


Measurements in mm.

- ☀ - Hot water connection for 1/2" tap fittings
- ❄ - Cold water connection for 1/2" tap fittings

**NOTE.** All linear measurements have a tolerance of  $\pm 5$  mm. The product must only be installed once walls and floors are finished. The washbasin must be horizontal supports that is able to resist stress.

**ATTENTION:** Hardware are needed to install the washbasin(provided with the basin).

SUIT WASHBASINS				PLUMBING DETAILS	
ART.	Net weight Kg	Shipping weight Kg	Shipping volume m <sup>3</sup>	Waste connection	Overflow capacity
L= 600 mm	15	16,8	0,066	Ø40 mm	CLASSE 25 = 15 l/min
L= 800 mm	19,6	21,8	0,086		
L= 1000 mm	24,2	26,8	0,107		
L= 1200 mm	28,4	31,8	0,127		

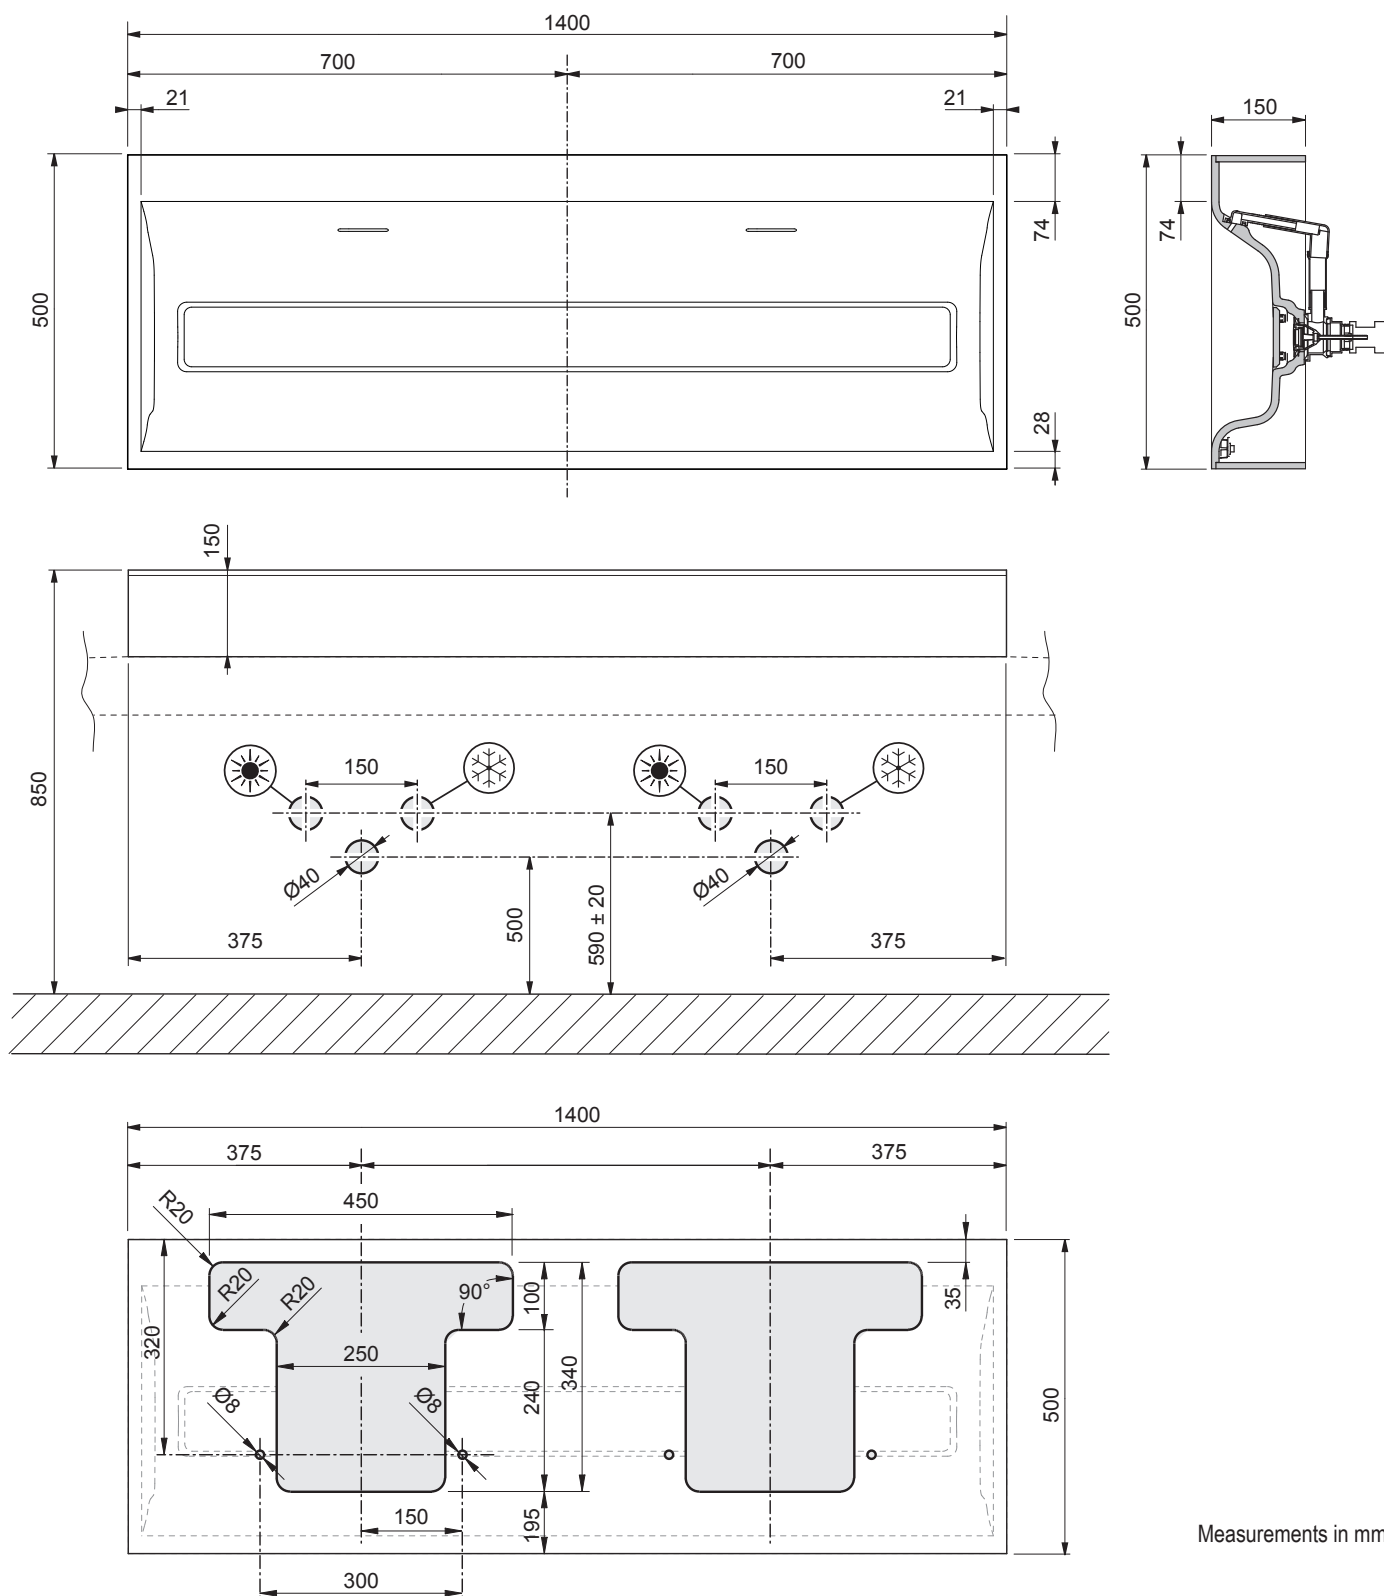

- ☀ - Hot water connection for 1/2" tap fittings
- ❄ - Cold water connection for 1/2" tap fittings

**NOTE.** All linear measurements have a tolerance of  $\pm 5$  mm. The product must only be installed once walls and floors are finished. The washbasin must be horizontal supports that is able to resist stress.

**ATTENTION:** Hardware are needed to install the washbasin(provided with the basin).

SUIT WASHBASINS				PLUMBING DETAILS	
ART.	Net weight Kg	Shipping weight Kg	Shipping volume m <sup>3</sup>	Waste connection	Overflow capacity
L= 1400 mm	33,4	36,8	0,148	Ø40 mm	CLASSE 25 = 15 l/min