


HOLE IN TOP

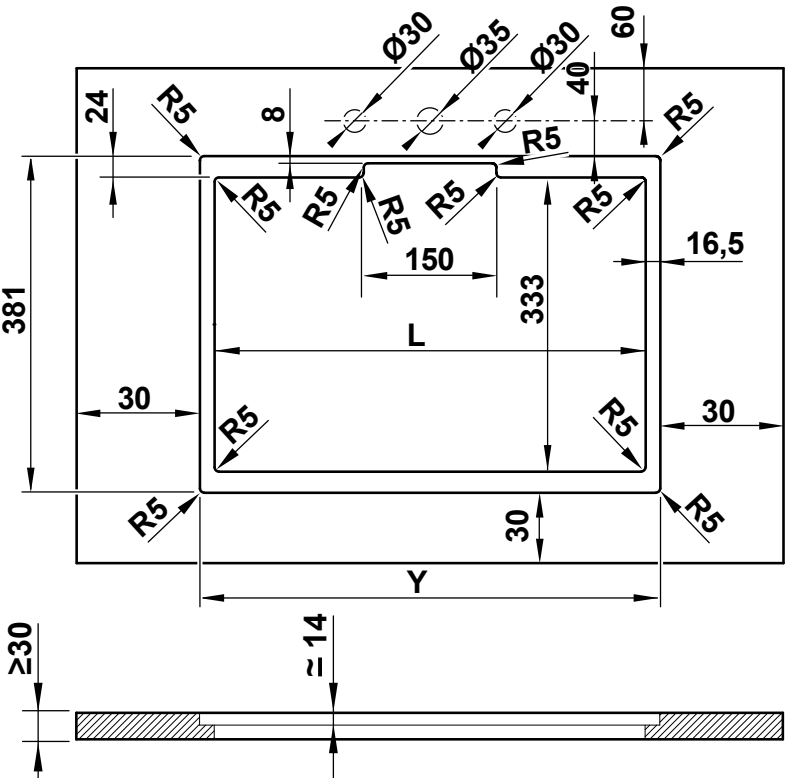

Size in mm.

PAPER WASHBASINS		
	U3C-----	U4C-----
X	520	720
Y	521	721
L	488	688

- ☀ - Hot water connection for 1/2" tap fittings
- ❄ - Cold water connection for 1/2" tap fittings

NOTE. All linear measurements have a tolerance of ± 5 mm.

NOTE. The product must only be installed once walls and floors are finished.

The product needs to be assembled on walls in masonry able to withstand stress or on walls that have been suitably reinforced for this purpose.

ATTENTION: The appropriate steel fixings (supplied together with the product) must be utilised for the installation, together with high-resistance chemical anchoring products (not supplied with the product) that must be used respecting the instructions of the manufacturer.

PAPER WASHBASINS						PLUMBING DETAILS		
ARTICLE	Net weight Kg		Shipping weight Kg		Shipping Volume m ³	Water supply	Waste connection	Overflow capacity
	Wood	Duralight	Wood	Duralight				
U3-----						1/2" Gas	Ø40 mm	CLASSE 25 = 15 l/min
U4-----								

