



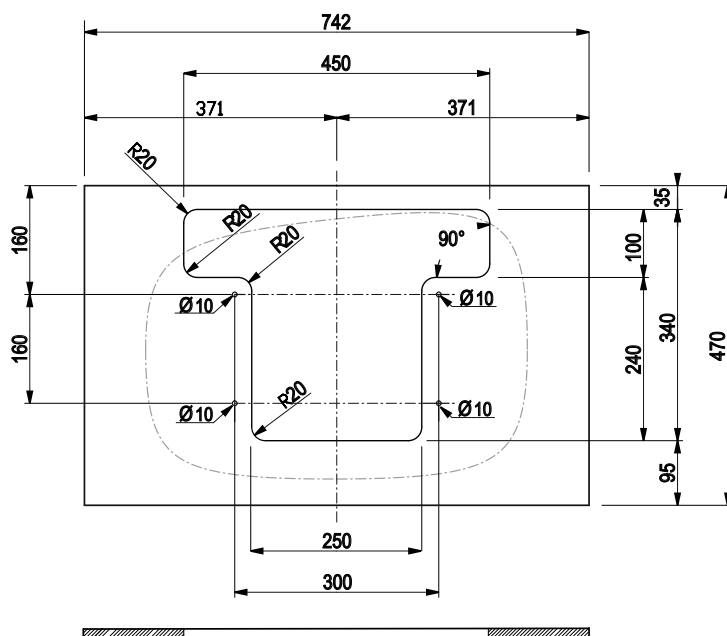
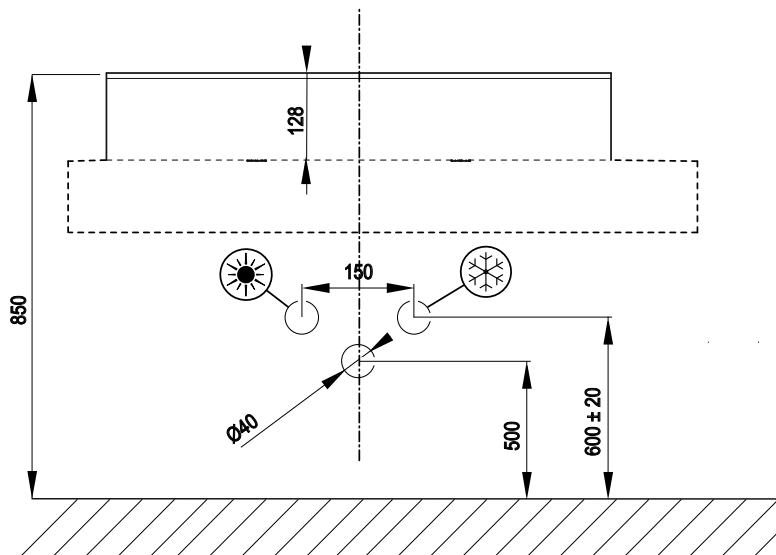
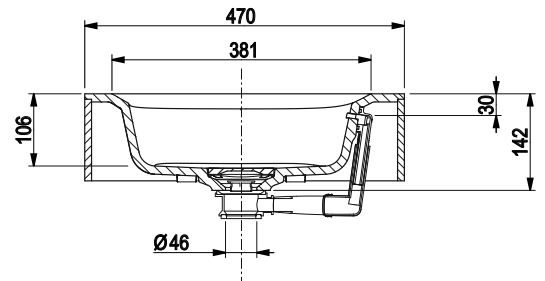
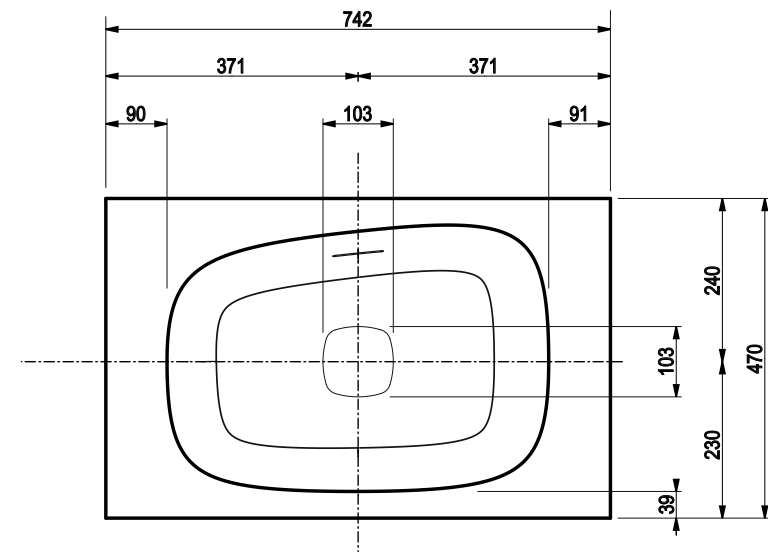
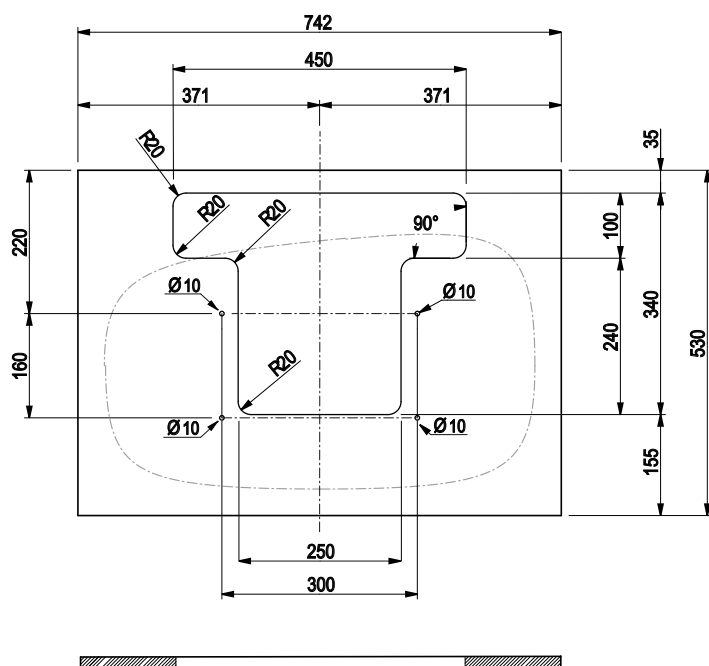
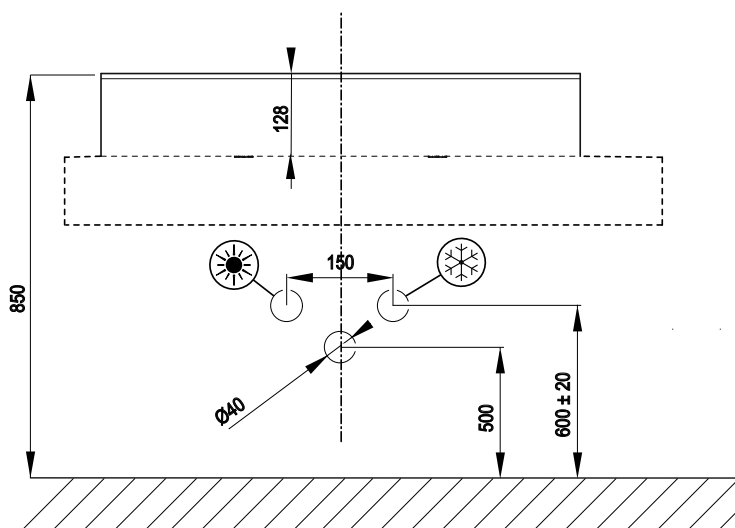
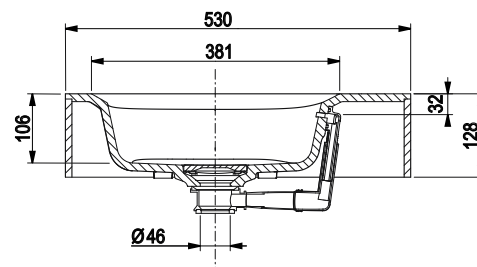
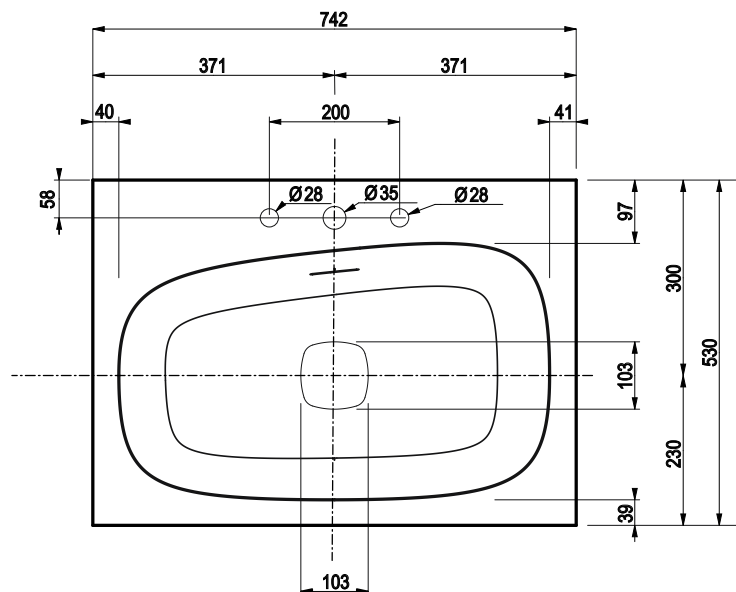


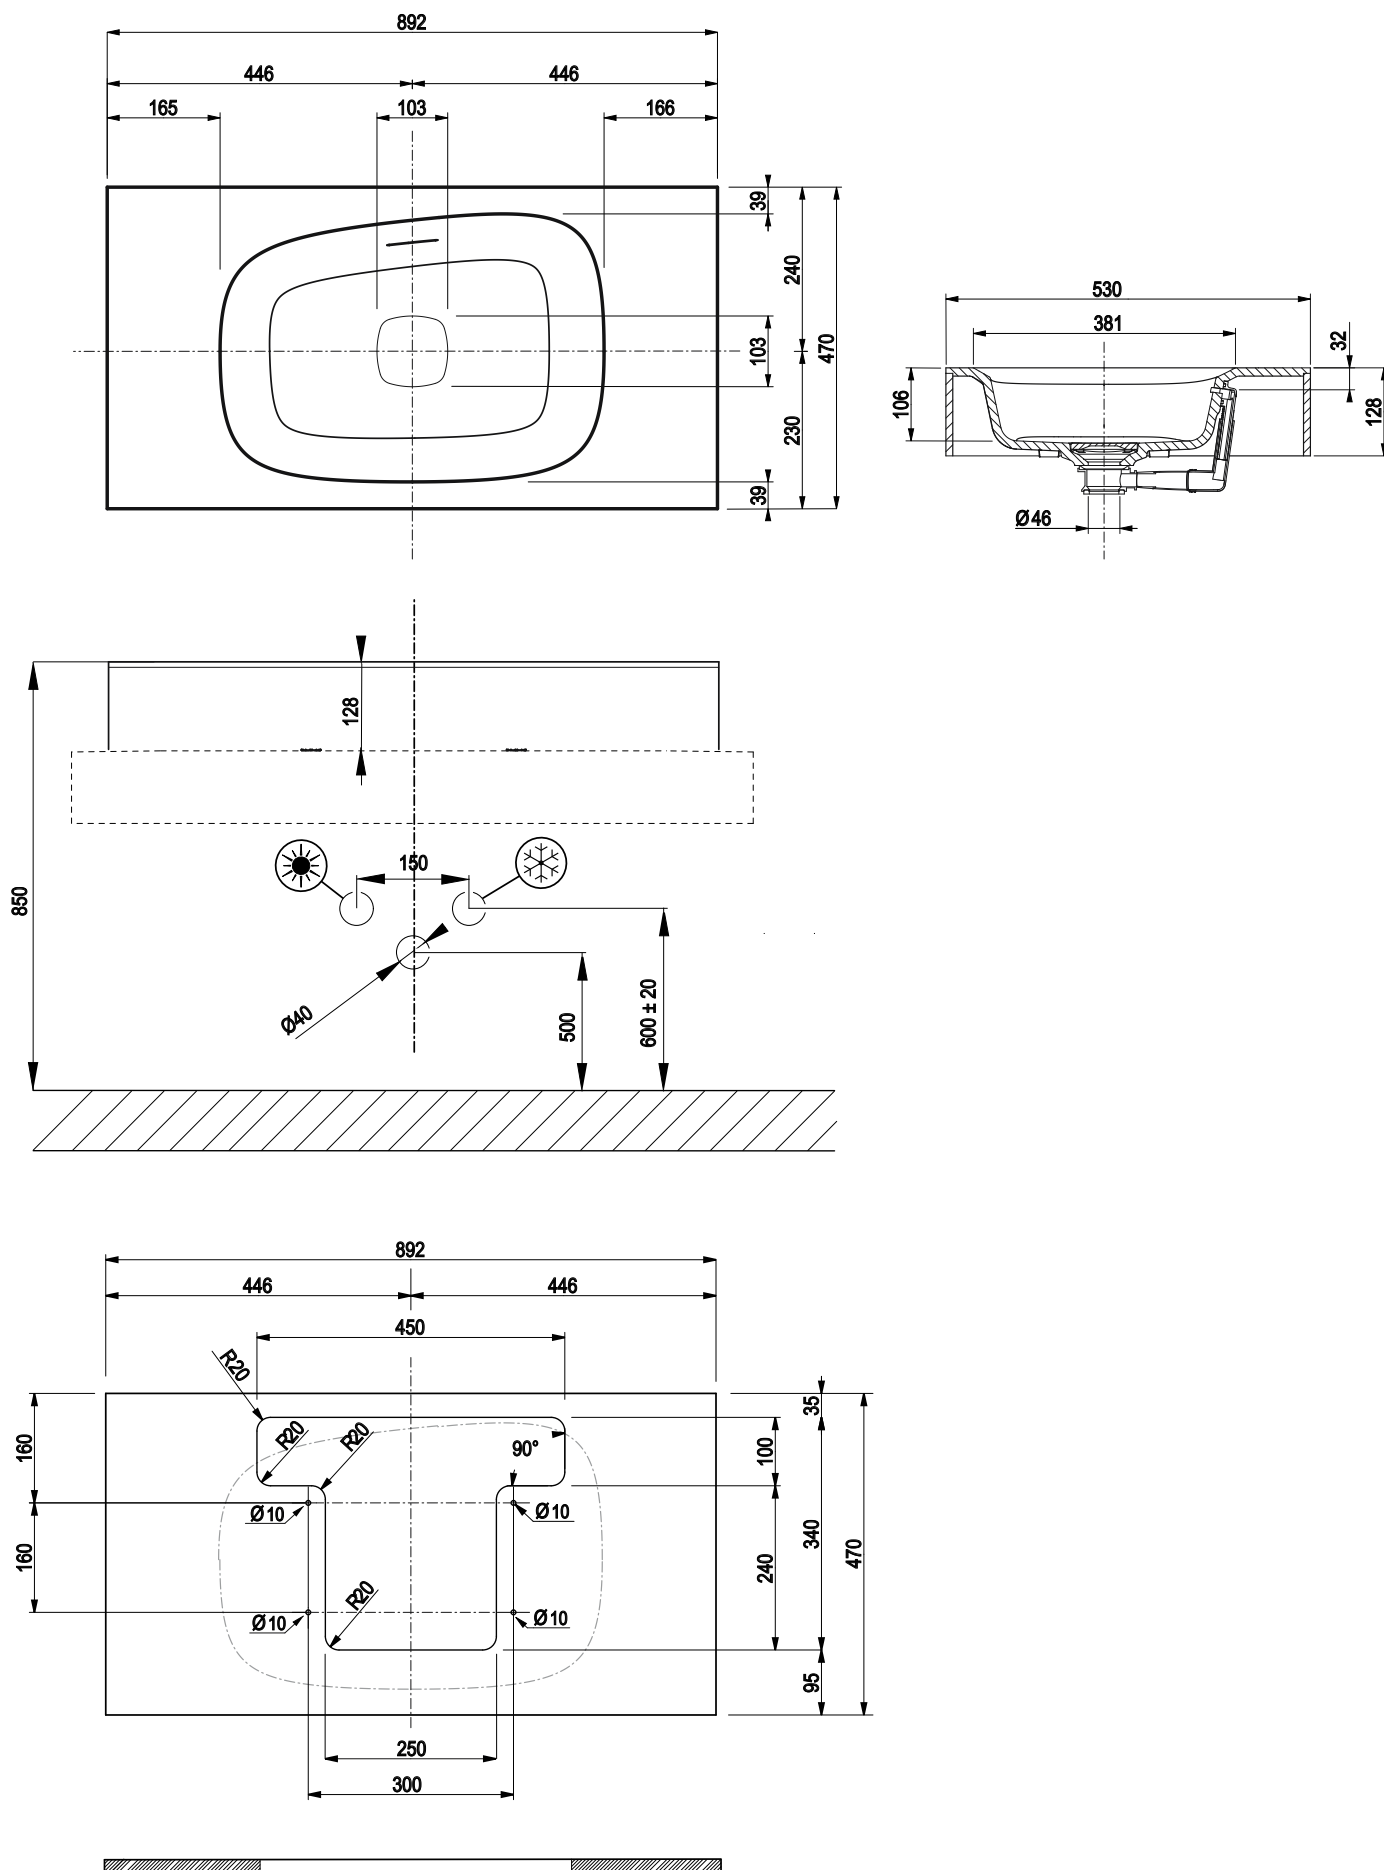

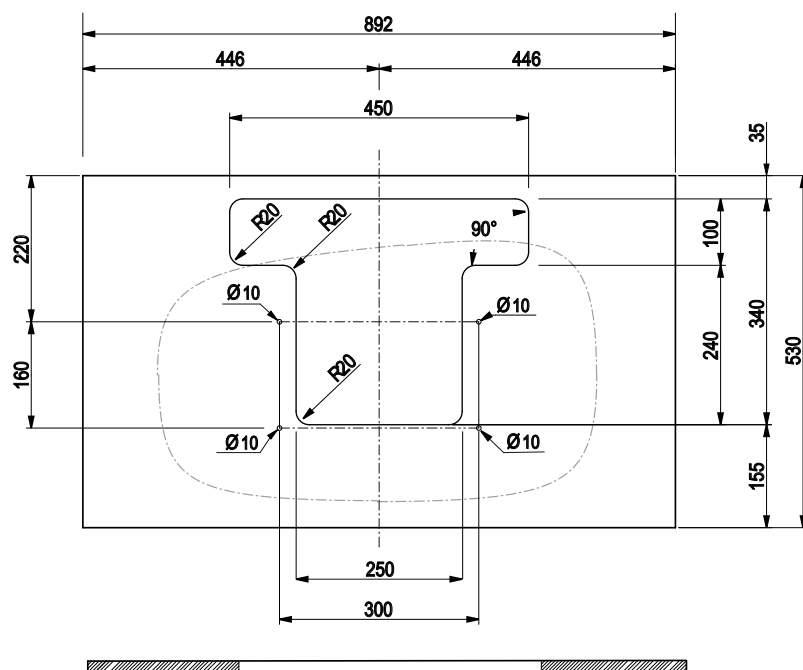

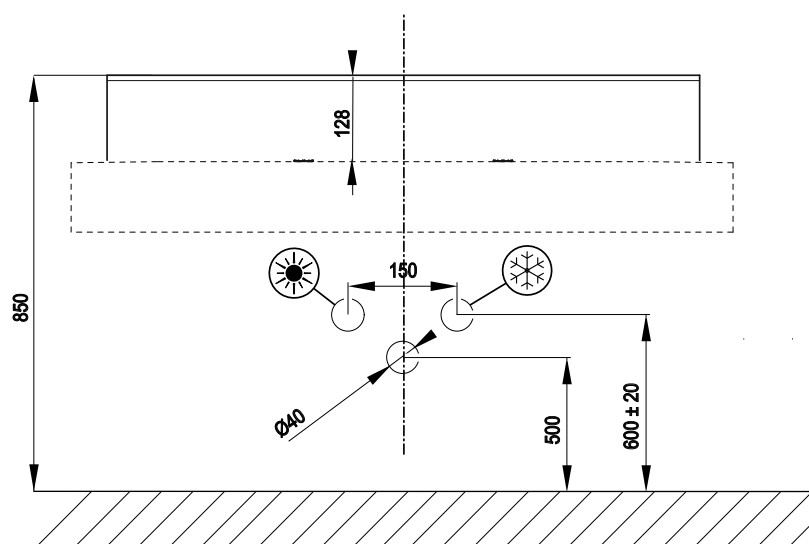

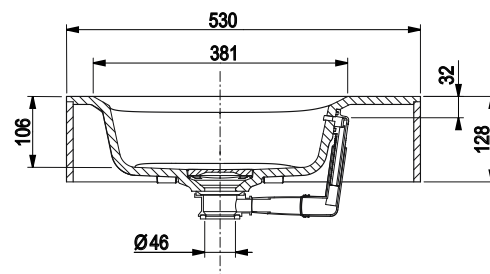

- ☀ - Hot water connection for 1/2" tap fittings
- ❄ - Cold water connection for 1/2" tap fittings

ATTENTION: Hardware are needed to install the washbasin(provided with the basin).

NOTE. All linear measurements have a tolerance of ± 5 mm.

NOTE. The product must only be installed once walls and floors are finished.

The washbasin must be horizontal supports that is able to resist stress.

OUTLINE WASHBASINS			PLUMBING DETAILS		
ARTICLE	Net weight Kg	Shipping weight Kg	Shipping volume m ³	Waste connection	Overflow capacity
	Duralight	Duralight			
742 x 470	15	28	0.24	Ø40 mm	CLASSE 25 = 15 l/min
742 x 530	16	29	0.24		
892 x 470	16.5	30	0.24		
892 x 530	18	31	0.24		